




This high frequency RFID reader/writer module uses tiny Mifare® chip card and is designed for the applications for handy terminal or custom-built for system integrators.

Specifications

Frequency	13.56MHz
Communication interface	RS232, TTL
Baud rate	19,200bps N, 8, 1
Read distance	Antenna dependant
Technical certificates	CE, FCC
Power requirement	5V DC, 100mA
Power output	0.2W
Display	None
Housing	None
Multi-detection	Yes
Transponder compatibility	ISO 14443A Mifare® Class Mifare® PRO, Ultralight, 1k, 4k
Operating temperature	0°C to 60°C
Storage temperature	-20°C to 70°C
Humidity	10% to 90% relative
Dimensions	26mm × 36mm × 11mm
Weight	10g

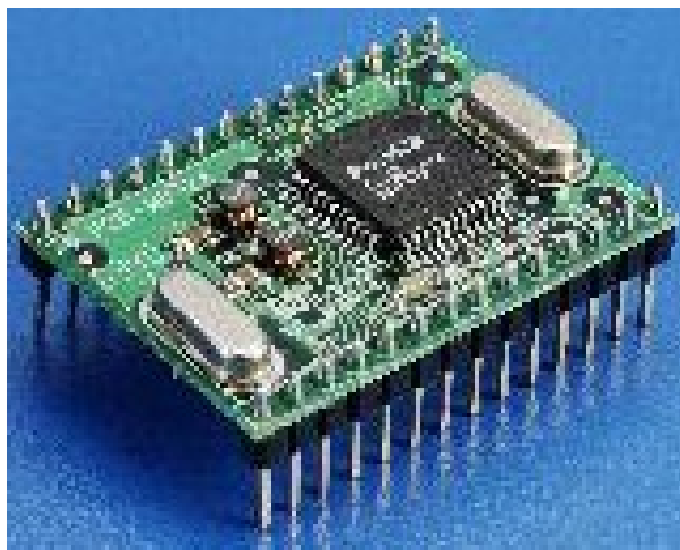




GAO RFID Inc.

A Member of GAO Group

Celebrating Over 15 Year of Innovation

Product Overview

**13.56MHz Mifare RFID Reader/Writer Module
(713004)**

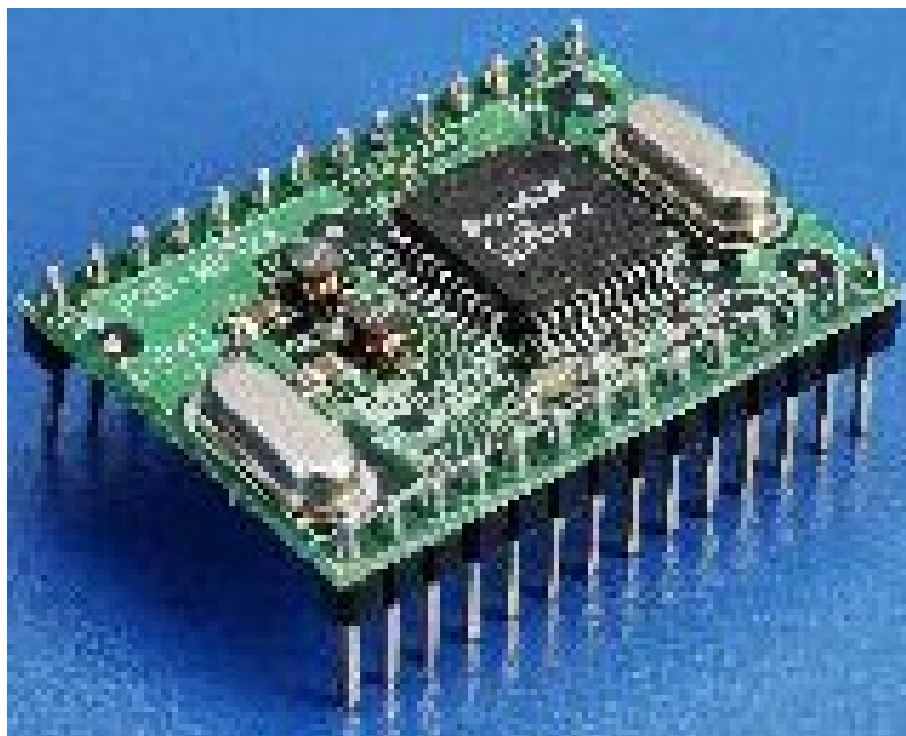

GAO Group

GAORFID.com

GAOTek.com

GAORFIDAssetTracking.com

GAOComm.com

GAOInstruments.com

GAOFiberOptics.com

GAOEmbedded.com

GAOResearch.com

Toll Free (USA & Canada)

1-877-585-9555

All Other Areas

416-292-0038

Dial Ext.601 for Sales
Ext.602 for Other Inquiries

China: 86-519-80691090
86-519-80691089

sales@GAORFID.com